

SP156P-5BB

MECHANICAL DATEAND DESIGN

◎ Format:

156.75x156.75mm

◎ Thickness:




210±30μm

◎ Fornt[-]:

**0.8mm bus bars[sliver],blue
anti-reflecting coating[silicon nitride]**

◎ Back[+]:

**1.6mm wide soldering pads[sliver],
back surface field[aluminum]**

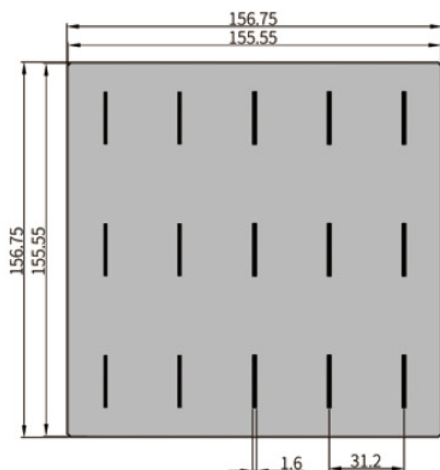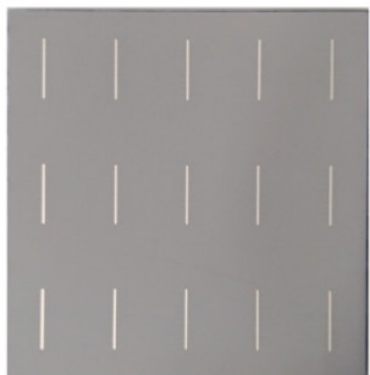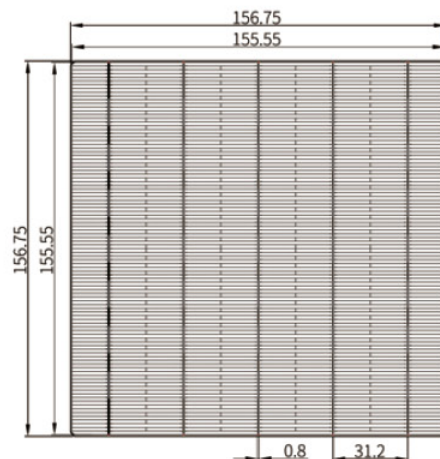


TEMPERATURE COEFFICIENTS

Tk Voltage	-0.363%/K
Tk Current	+0.071%/K
TK Power	-0.369%/K

Efficiency[%]	Pmpp[W]	Umpp[V]	Impp[A]	Uoc[V]	Isc[A]	FF[%]
>19.00	4.67	0.546	8.550	0.648	9.072	79.40
18.90-19.00	4.64	0.545	8.514	0.647	9.039	79.35
18.80-18.90	4.62	0.544	8.491	0.646	9.018	79.30
18.70-18.80	4.59	0.543	8.461	0.645	8.979	79.25
18.60-18.70	4.57	0.542	8.432	0.644	8.960	79.20

Spectrum Response[SR]

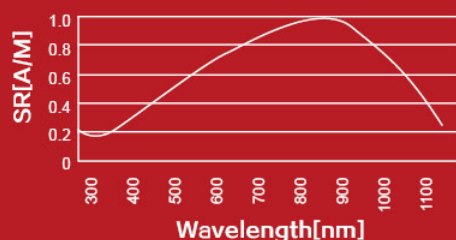

SUNPRO POWER CO.,LTD

Add: Qinggang Industrial Zone, Yuhuan, Zhejiang, 317606, China

Tel: +86-576-80730906

E-mail: info@sunpropower.com

Fax: +86-576-80730906

Web: www.sunpropower.com