



440~460W HY460-M120BSS

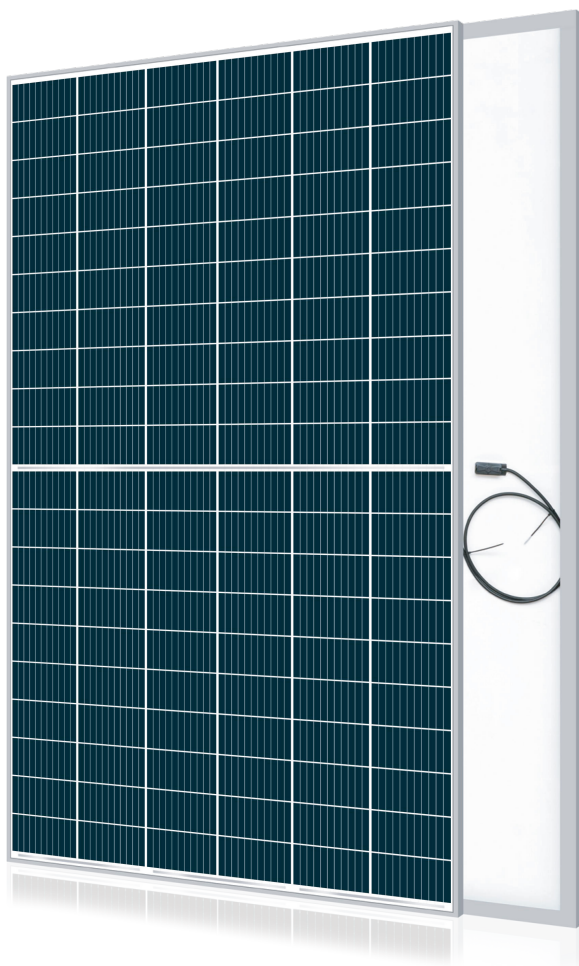

LINEAR PERFORMANCE WARRANTY

- 15 Year Product Warranty
- 25 Year Linear Power Warranty

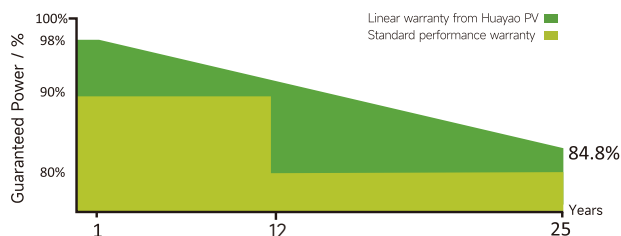

Hyper M60

Mono-facial
120-cell, MBB
0~+3% positive tolerance

KEY FEATURES



Mbb half cell design

Half-cut cells bring lower cell connection loss and lower thermal coefficients to ensure higher power output



More Power

Innovative 182mm big cell applied to ensure module power up to 460 Wp



High Reliability

Strict outsourcing BOM materials quality control and 100% in-house wafer and cell applied to module production



Excellent Low-light Performance

Advanced solar cell surface texturing technology allows for excellent performance in low-light environments



Highly Strengthened Design

Certified to withstand 5400Pa snow load and 2400Pa wind load



PID Resistant

Excellent PID resistance performance optimized by unique cell process design and BOM material control



Fire resistance

Class of reaction to Class C

IEC 61215 (2016), IEC 61730 (2016)



