

PV 004 Solar PV Connector



Parameters

Type PV004

Rated Voltage 1000V DC

Contact Materials
Tin plated copper

Rated Current 30A

Standard IEC 62852:2014

Protection Degree IP67


• Contact Resistance ≤0.3mΩ

Ambient Temperature −40℃~+85℃

Cable Cross Section Area 2.5mm²,4mm²,6mm²

Insulation Material
PC EXL9330

• Flame Class UL94 V-0

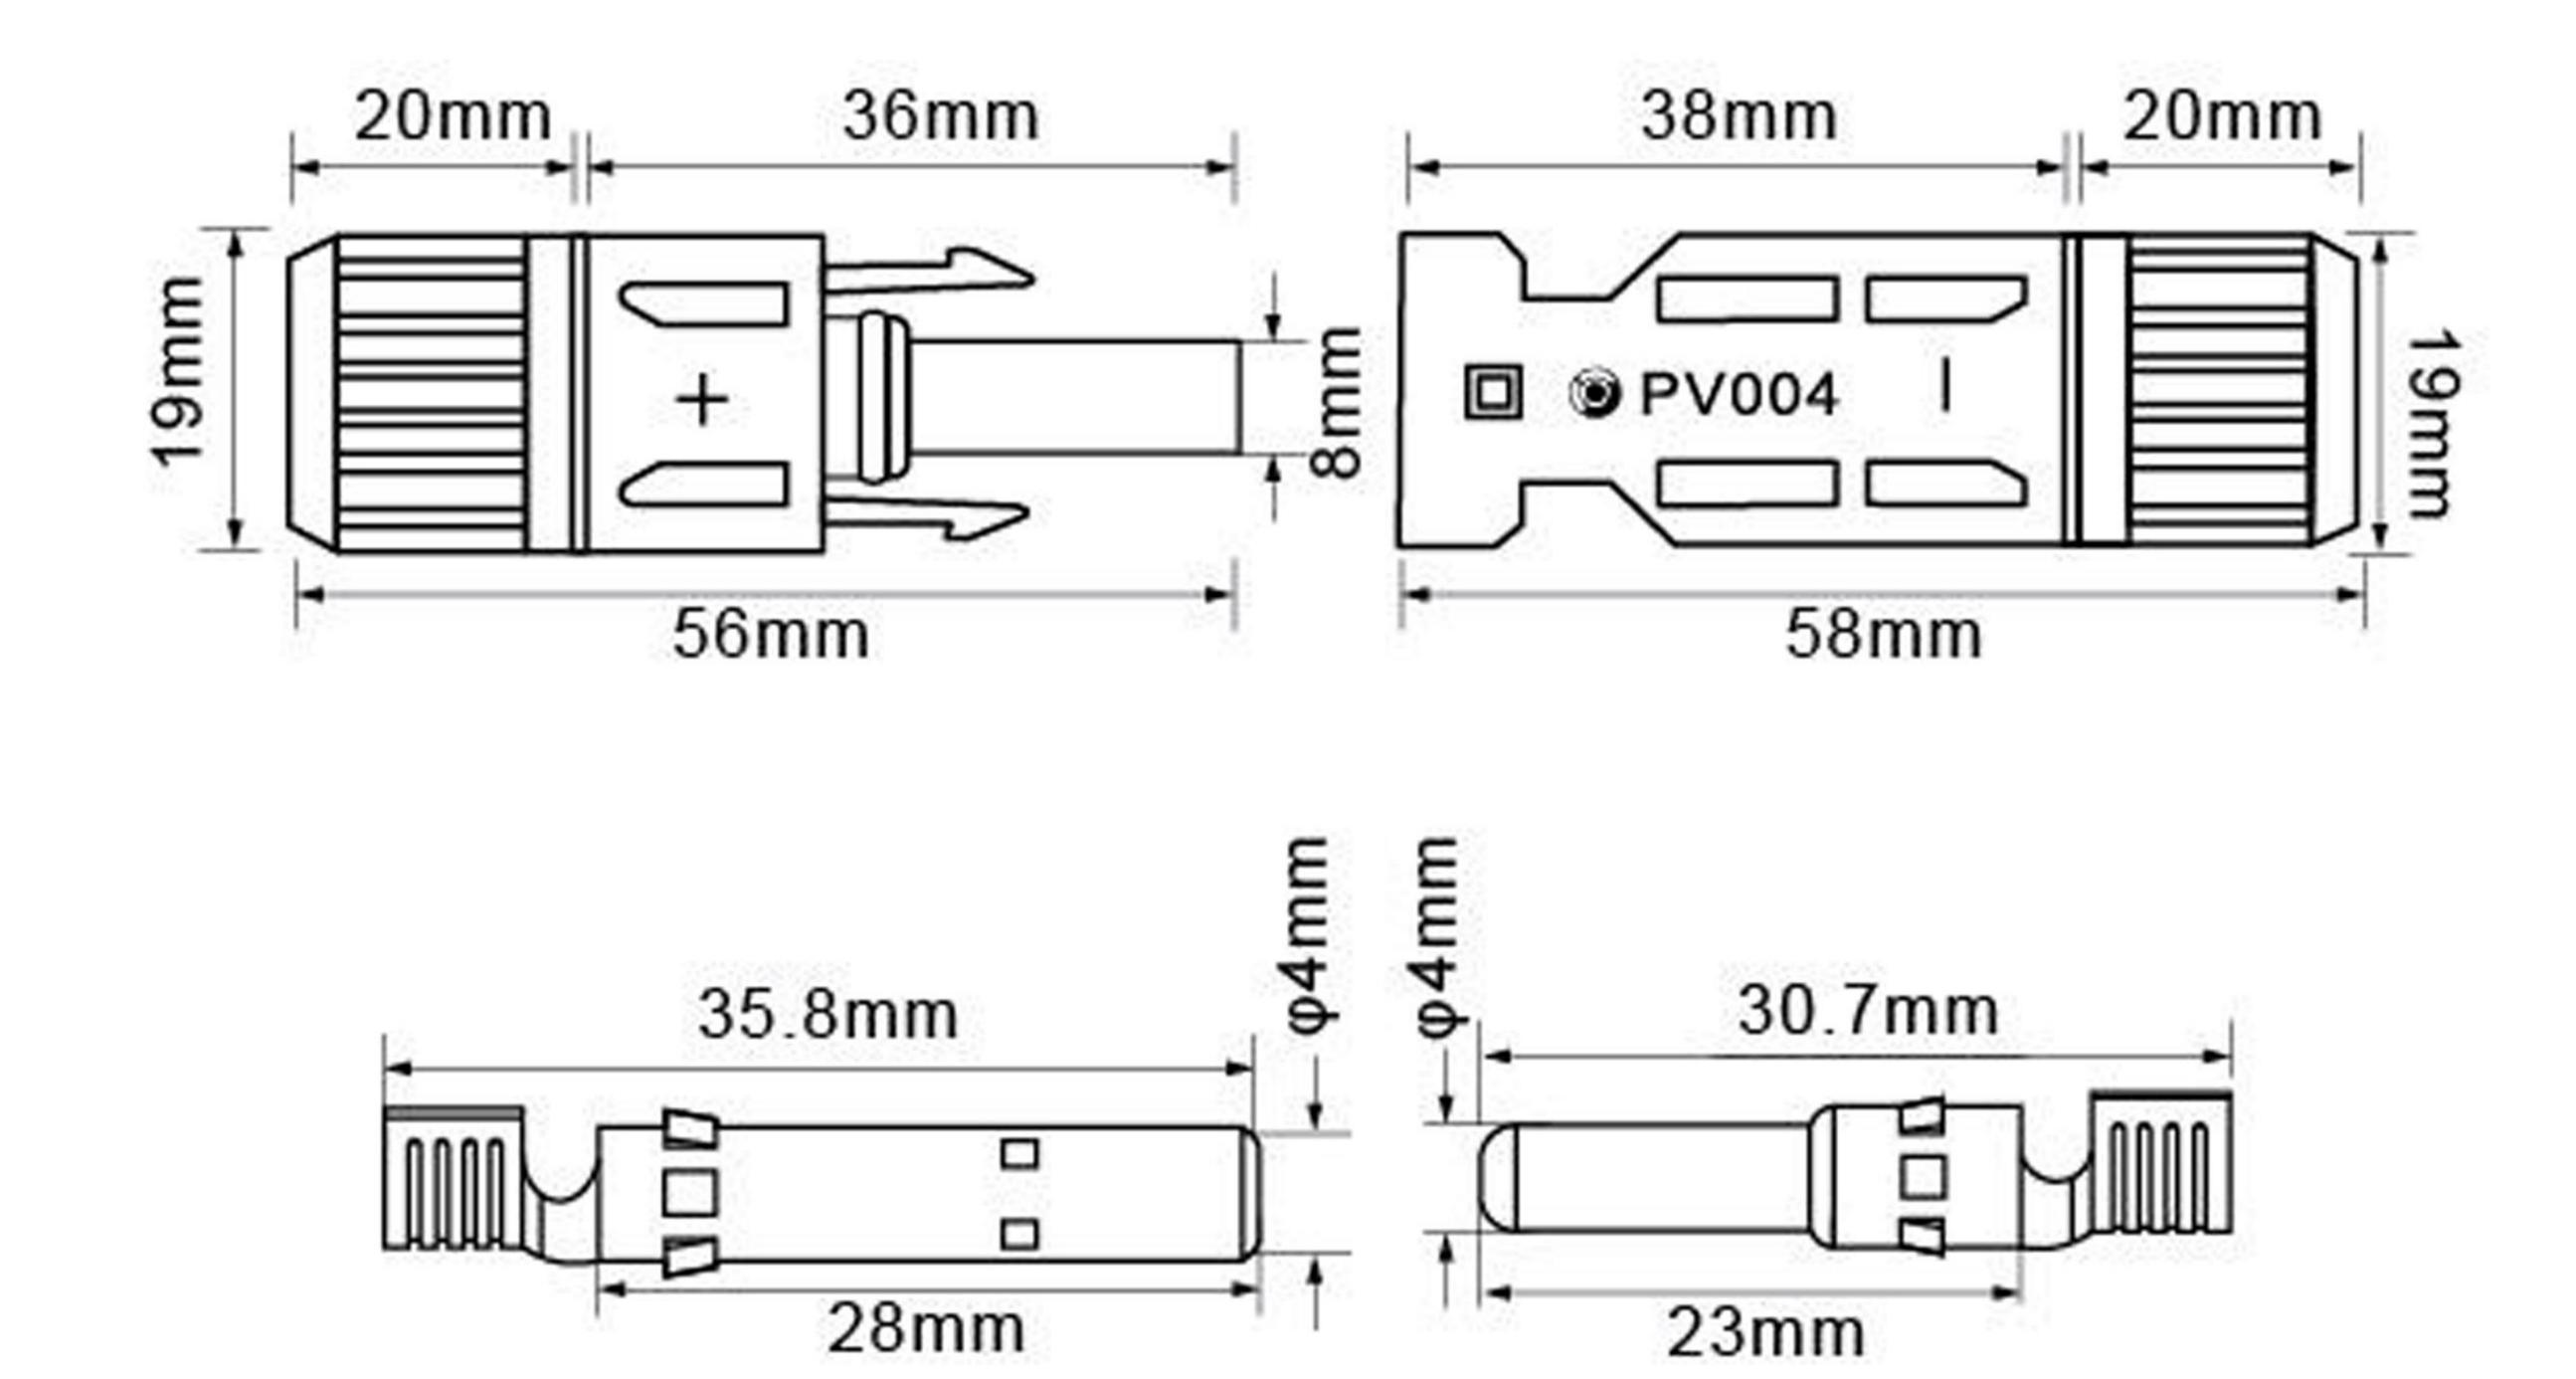

Feature

- The surface is acid-resistant and uv-resistant
- Good heat resistance and cold resistance
- Quality Assurance for 5 years
- TUV certification
- Suitable for outdoor harsh environment
- Waterproof and dustproof design
- Flame retardant