

## Tile Roof Mount

Roof hooks are applied to many different tiles such as pantile, Roman tile, slate, clay tile, etc. Adjustable hooks can be adjusted horizontally and vertically.

### Feature

- Simple and Fast Installation
- No Drilling nor Welding on Rooftop



### Specification

|                    |                                      |
|--------------------|--------------------------------------|
| Tilt Angle         | 0° ~ 45°                             |
| Wind Speed         | 60 m/s                               |
| Snow Load          | 2.4 kN/m <sup>2</sup>                |
| PV Module          | Framed / Frameless                   |
| Module Orientation | Landscape / Portrait                 |
| Main Material      | AL6005-T5 (Anodized), A2-70 (SUS304) |
| Color              | Silver / Black                       |
| Warranty           | 15 Years                             |

### Bill of Materials for 100kW Project


| No. | Product                      | QTY<br>25 Arrays of 1PX10<br>400W<br>1722*1134*30mm | QTY<br>19 Arrays of 1PX10<br>550W<br>2278*1134*35mm |
|-----|------------------------------|---|---|
| 1   | Rail                         | 590 Meters  | 448 Meters  |
| 2   | Rail Splice Kit              | 150   | 114   |
| 3   | Mid Clamp Kit                | 450   | 342   |
| 4   | End Clamp Kit                | 100   | 76  |
| 5   | Roof Hook                    | 700   | 532   |
| 6   | Grounding Clip<br>(Optional) | 225   | 171   |
| 7   | Grounding Lug<br>(Optional)  | 50  | 38  |

\*Notes: QTYs listed above are based on layout 1PX10 and they may vary depending on different modules and layouts.

### Certificate



### Component

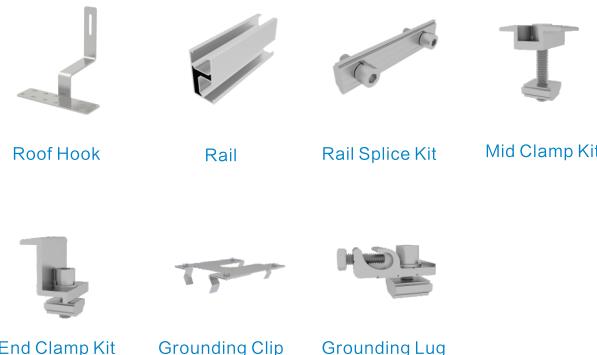

### Option

