

60
Series

HJT Module Dual Glass

375 - 395 w

NeX Series: SNX-C60HND

21.1%


Maximum Efficiency

0-+5w

Positive Power Tolerance

30 years

Product Warranty

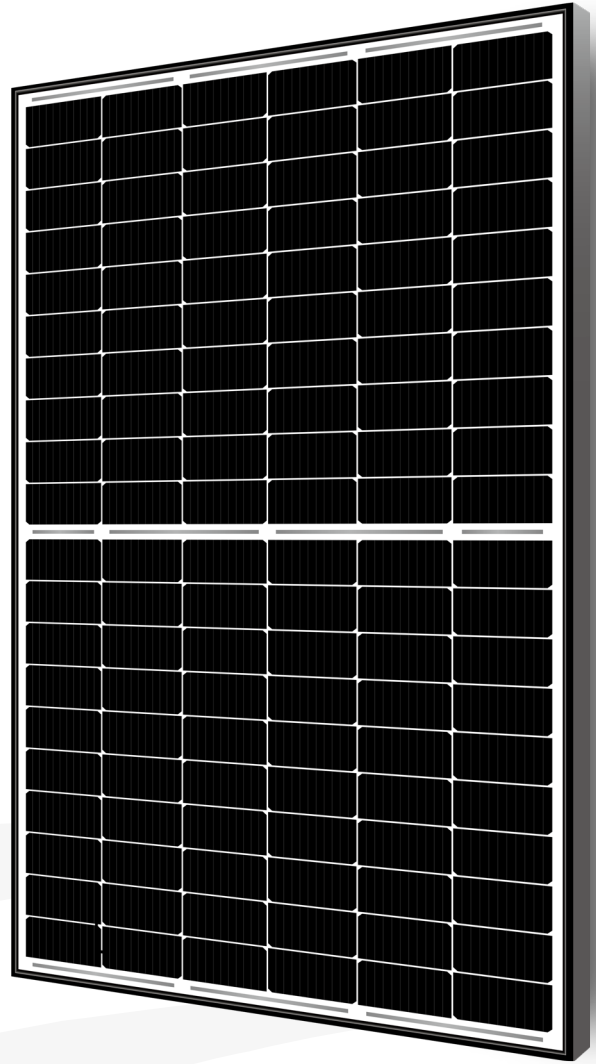

HIGHER VALUE

- ✘ Longer Warranty terms and lower power degradation
- ✘ Lower LCOE for shorter payback period




HIGHER PERFORMANCE

- ✘ Module Power reaches up to 375W by multi-busbar cell design
- ✘ Lower resistance performance by half-cell structure
- ✘ Lower LID by lower string current

MORE RELIABLE

- ✘ Excellent anti-PID performance
- ✘ Lower hot spot risks
- ✘ Lower Pmax temperature coefficient
- ✘ Mechanical loading 5400Pa snow load and 2400Pa wind load

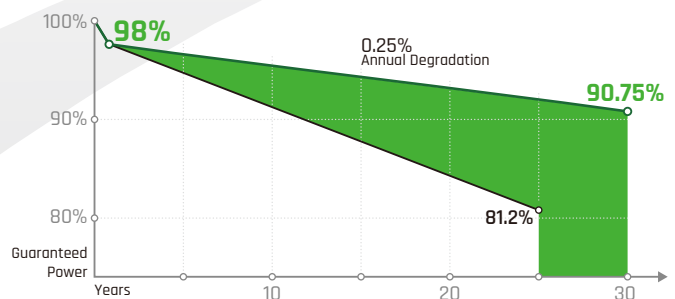

Sonnex HJT Dual Glass Module Performance Warranty

Warranty

30 years product workmanship warranty, 30 years linear power output warranty. The power degradation for the first year will be less than 2%. From the 2nd year and onwards, the annual degradation will be less than 0.25%. Guaranteed performance ratio of 90.75% after 30 years.

Sonnex Energie GmbH

Add: Böttgerstraße 12, 20148 Hamburg, Germany
www.sonnexenergie.com info@sonnexenergie.de

375 - 395W Dual Glass MODULE SNX-C60HND

60 Series

Electrical Characteristics at Standard Test Conditions(STC)

Module Type: SNX-C60HND-***M	375	380	385	390	395
Maximum Power-Pm [W]	375	380	385	390	395
Open Circuit Voltage-Voc [V]	44.20	44.45	44.70	44.95	45.20
Short Circuit Current-Isc [A]	10.78	10.85	10.92	10.99	11.06
Maximum Power Voltage-Vm [V]	37.47	37.67	37.86	38.05	38.24
Maximum Power Current-Im [A]	10.01	10.09	10.17	10.25	10.33
Module Efficiency-η [%]	19.98	20.25	20.51	20.78	21.05

Electrical Characteristics at NMOT

Maximum Power-Pm [W]	285	290	293	297	301
Open Circuit Voltage-Voc [V]	42.03	42.27	42.50	42.74	42.97
Short Circuit Current-Isc [A]	8.71	8.76	8.82	8.87	8.93
Maximum Power Voltage-Vm [V]	35.02	35.24	35.44	35.66	35.88
Maximum Power Current-Im [A]	8.16	8.22	8.28	8.33	8.38

Note: 1. Standard Test Conditions [STC]: Irradiance 1000 W/m²; AM 1.5; Ambient temperature 25°C ;
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m²; wind speed 1m/s; ambient temperature 20°C.
 3. Tolerance of Pm: 0-+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

Mechanical Characteristics

Dimensions	1755 × 1038 × 30 mm
Weight	23.5kg
Front Glass	Front/Back side tempered glass, 2.0mm
Frame	Anodized aluminum alloy
Cells	Mono-crystalline HJT solar cell 166mm*83mm
Cell Orientation	120 (6×20)
Junction Box	IP68
Cable/Connectors	4mm ² / MC4 or EVO2

Temperature Characteristics

NMOT	45 °C (±2°C)
Temperature Coefficient of Voc	-0.22% / °C
Temperature Coefficient of Isc	+0.047% / °C
Temperature Coefficient of Pm	-0.24% / °C


Maximum Ratings

Maximum System Voltage [V]	DC 1500(IEC)
Series Fuse Rating [A]	20
Maximum Surface Load Capacity [Pa]	5,400
Temperature Range [°C]	- 45 to + 85
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m·s ⁻¹

Other Characteristics

Packaging 35, 35+4 pcs/pallet; 962 pcs/40' HQ container

I-V curve

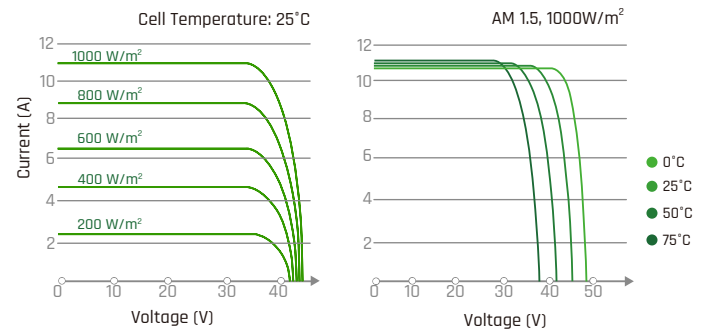

Declaration: Along with the technical improvement and product update, deviation between the technical parameter and Sonnex future products might occur. Specifications included in this datasheet are subject to change without prior notice. Sonnex reserves the right of final interpretation.

Drawing

